

# TENGHUATAI ELECTRONICS CO., LTD

## SOT-23 Encapsulate Adjustable Reference Source


### THT431 Adjustable Accurate Reference Source

#### DEVICE DESCRIPTION

The THT431 is a three-terminal adjustable shunt regulator offering excellent temperature stability. This device has a typical dynamic output impedance of  $0.2\Omega$ . The device can be used as a replacement for zener diodes in many applications.

#### FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance, its typical value is  $0.2\Omega$
- Trapping current capability is 1 to 100mA
- Low output noise voltage
- Fast on-state response
- The effective temperature compensation in the working range of full temperature
- The typical value of the equivalent temperature factor in the whole temperature scope is  $50 \text{ ppm}/^\circ\text{C}$

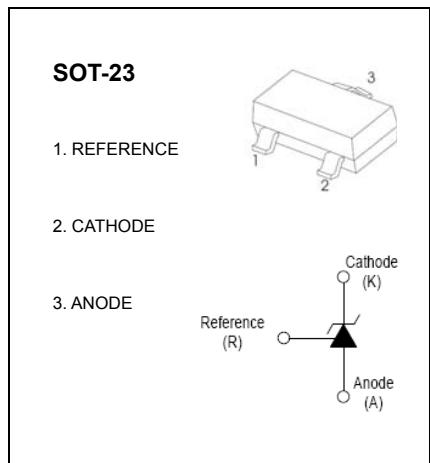

#### APPLICATION

- Shunt Regulator
- High-Current Shunt Regulator
- Precision Current Limiter

#### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Cathode Voltage	$V_{KA}$	37	V
Cathode Current Range (Continuous)	$I_{KA}$	-100~+150	mA
Reference Input Current Range	$I_{ref}$	0.05~+10	mA
Power Dissipation	$P_D$	300	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	$T_j$	150	$^\circ\text{C}$
Operating Ambient Temperature Range	$T_{opr}$	0~+70	$^\circ\text{C}$
Storage temperature Range	$T_{stg}$	-65~+150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reference input voltage (Fig.1)	$V_{\text{ref}}$	$V_{\text{KA}}=V_{\text{REF}}, I_{\text{KA}}=10\text{mA}$		2.450	2.5	2.550	V
Deviation of reference input voltage over temperature (note) (Fig.1)	$\Delta V_{\text{ref}}/\Delta T$	$V_{\text{KA}}=V_{\text{REF}}, I_{\text{KA}}=10\text{mA}$ $T_{\text{min}} \leq T_a \leq T_{\text{max}}$			4.5	17	mV
Ratio of change in reference input voltage to the change in cathode voltage (Fig.2)	$\Delta V_{\text{ref}}/\Delta V_{\text{KA}}$	$I_{\text{KA}}=10\text{mA}$	$\Delta V_{\text{KA}} = 10\text{V} \sim V_{\text{REF}}$		-1.0	-2.7	mV/V
			$\Delta V_{\text{KA}} = 36\text{V} \sim 10\text{V}$		-0.5	-2.0	mV/V
Reference input current (Fig.2)	$I_{\text{ref}}$	$I_{\text{KA}}=10\text{mA}, R_1=10\text{k}\Omega$ $R_2=\infty$			1.5	4	$\mu\text{A}$
Deviation Of reference input current over full temperature range (Fig.2)	$\Delta I_{\text{ref}}/\Delta T$	$I_{\text{KA}}=10\text{mA}, R_1=10\text{k}\Omega$ $R_2=\infty$ $T_a=\text{full Temperature}$			0.4	1.2	$\mu\text{A}$
Minimum cathode current for regulation (Fig.1)	$I_{\text{KA(min)}}$	$V_{\text{KA}}=V_{\text{REF}}$			0.45	1.0	mA
Off-state cathode Current (Fig.3)	$I_{\text{KA(OFF)}}$	$V_{\text{KA}}=36\text{V}, V_{\text{REF}}=0$			0.05	1.0	$\mu\text{A}$
Dynamic impedance	$Z_{\text{KA}}$	$V_{\text{KA}}=V_{\text{REF}}, I_{\text{KA}}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{kHz}$			0.15	0.5	$\Omega$


note:  $T_{\text{MIN}}=0^\circ\text{C}$ ,  $T_{\text{MAX}}=+70^\circ\text{C}$



**CLASSIFICATION cZV<sub>ref</sub>**

Rank	*** 0.5%	.....1%
Range	2.487-2.513	2.475-2.525



# Typical Characteristics

THT431


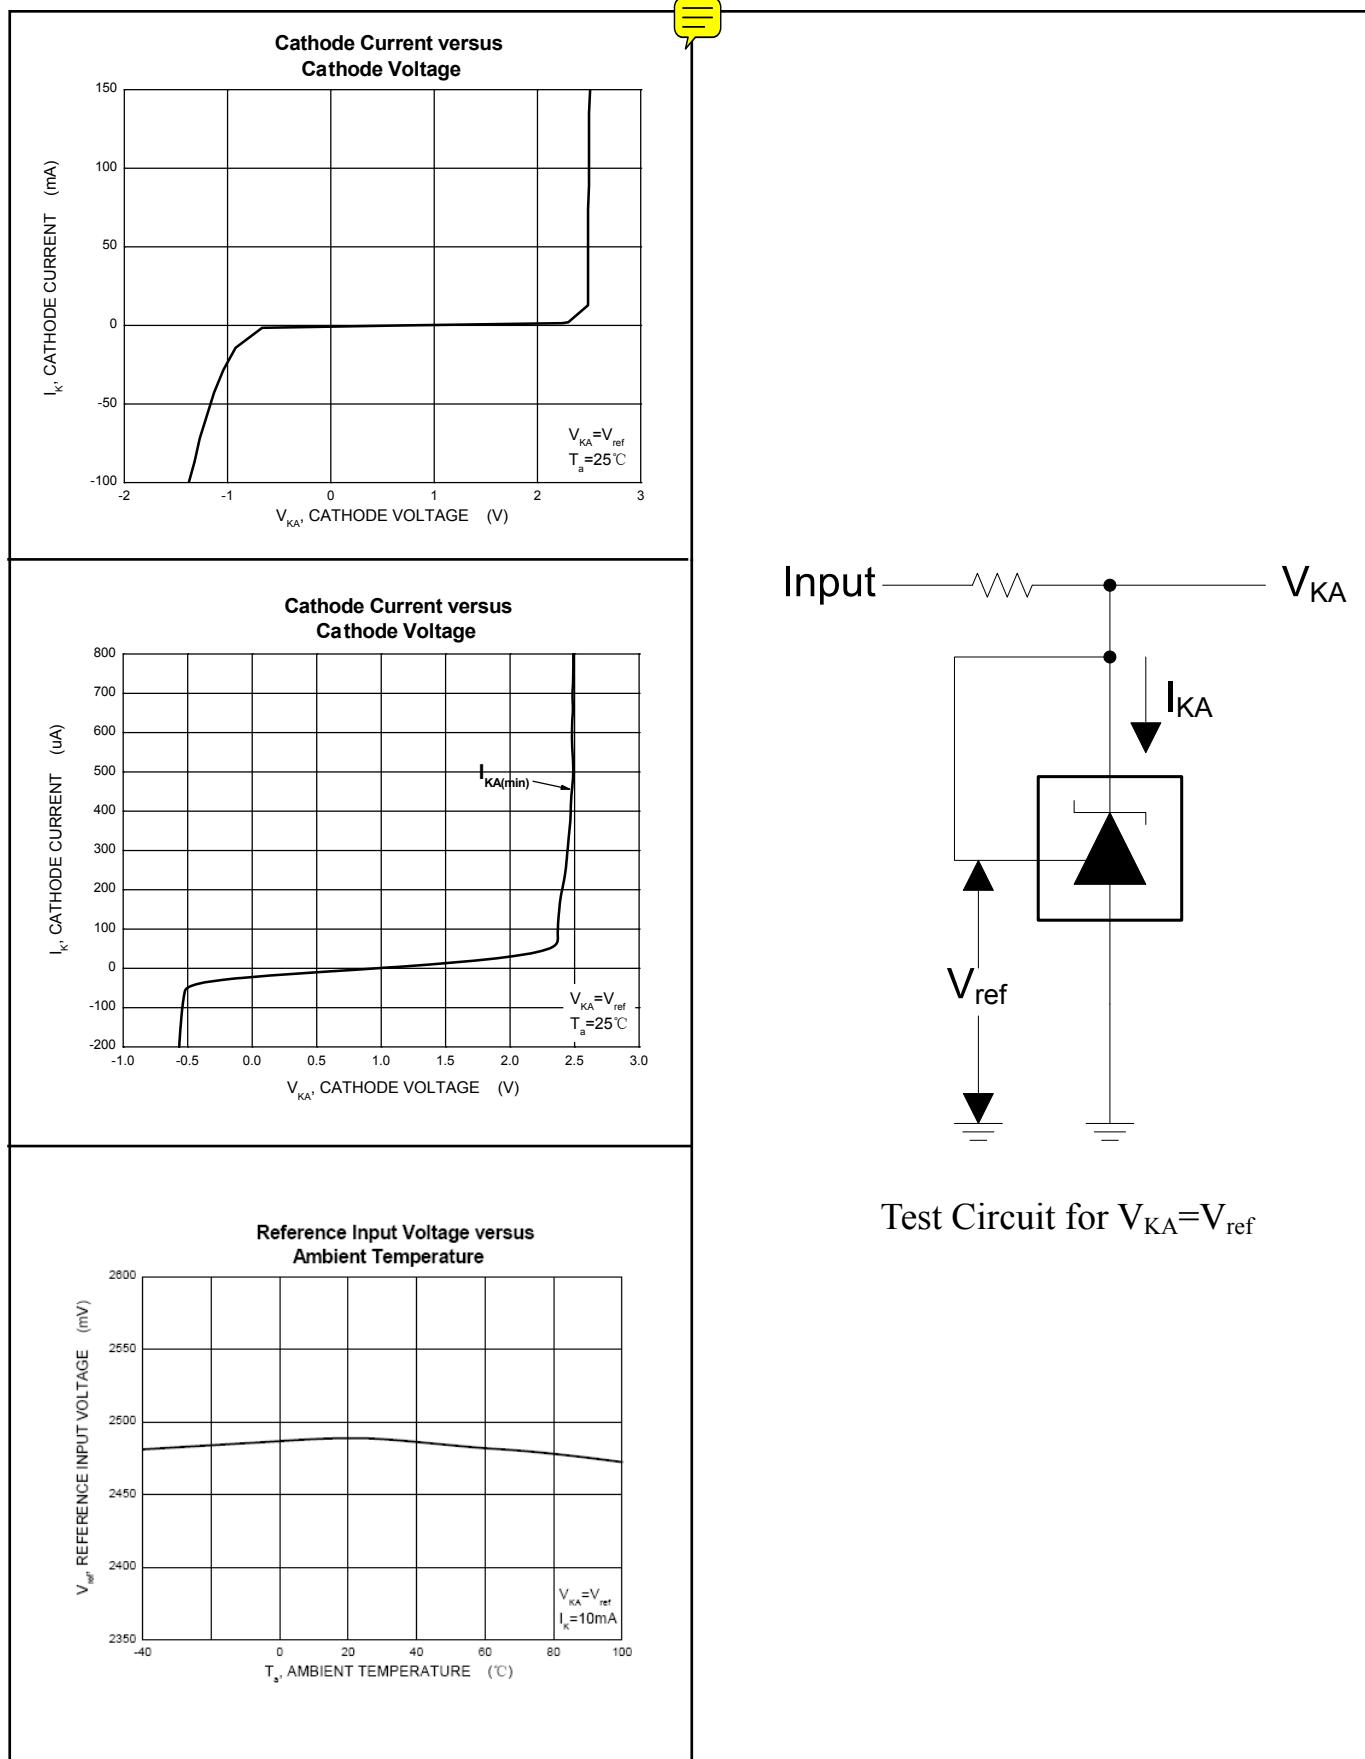


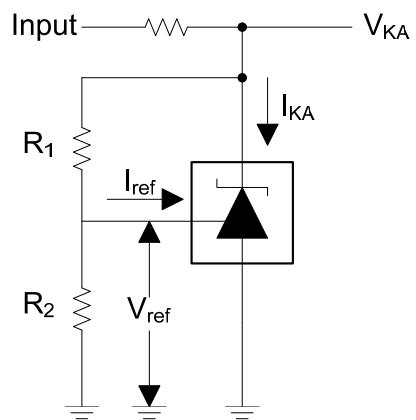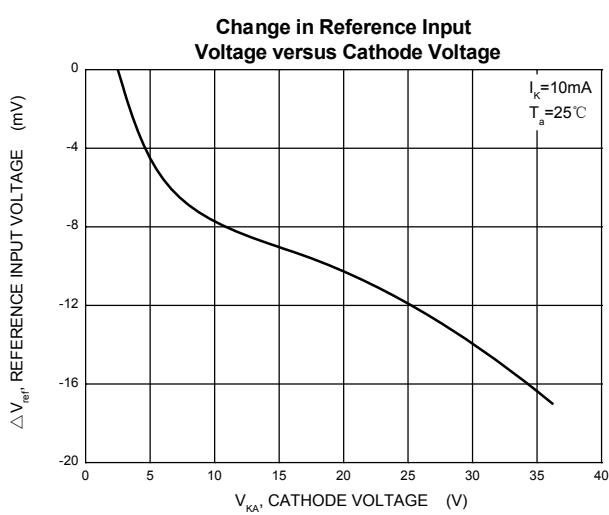

Test Circuit for  $V_{KA} = V_{ref}(1+R_1/R_2) + R_1 \cdot I_{ref}$

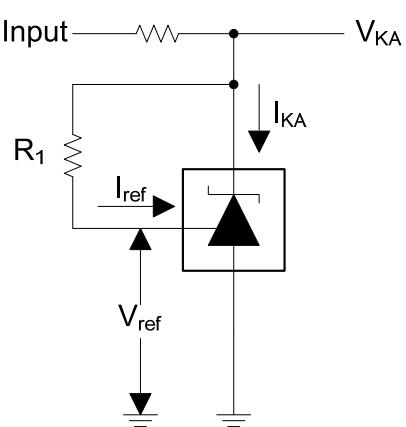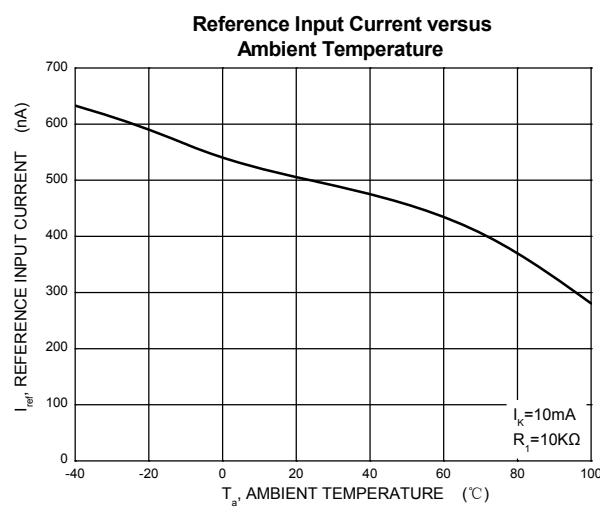

Test Circuit for I<sub>ref</sub>

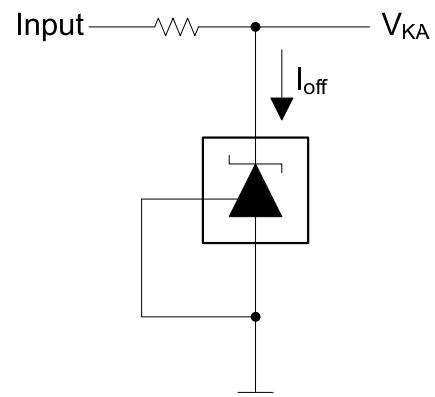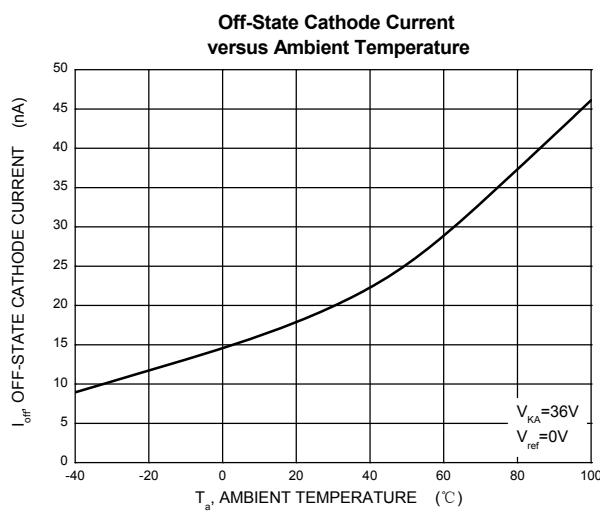

Test Circuit for I<sub>off</sub>